


DIN 912

Hexagon socket head cap screws

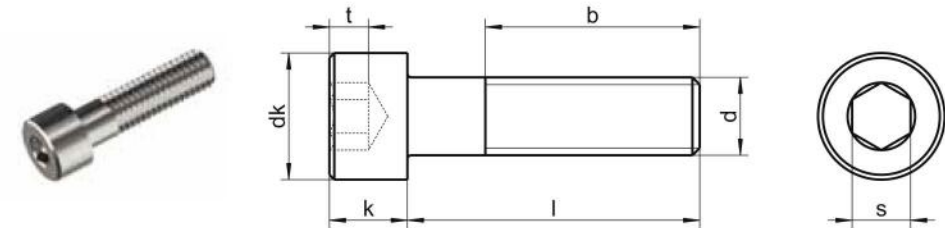

dk max.	3,0	3,8	4,5	5,5	7,0	8,5	10,0	13,0	16,0	18,0	21,0	24,0	27,0
k max.	1,6	2,0	2,5	3,0	4,0	5,0	6,0	8,0	10,0	12,0	14,0	16,0	18,0
s	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
b	15	16	17	18	20	22	24	28	32	36	40	44	48
t	0,7	1,0	1,1	1,3	2,0	2,5	3,0	4,0	5,0	6,0	7,0	8,0	9,0
●	1,5	1,5	2	2,5	3	4	5	6	8	10	12	14	14
Length / Ø	M1,6	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	M14	M16	M18
3	▲ ●	▲ ●											
4	▲ ●	▲ ●	▲ ●	▲ ●									
5	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●								
6	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●						
8	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●						
10	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●					
12	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●				
14	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●				
16	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
18		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●			
20		▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
22			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
25			▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	
30				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
35				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
40				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
45				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
50				▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
55					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
60					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
65					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
70					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
75					▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●	▲ ●
SU	1000	1000	1000	1000 ≥ 45 500	1000 ≥ 35 500	500 ≥ 45 200	500 ≥ 45 200 ≥ 75 100	200 ≥ 45 100	100	100 ≥ 55 50	25	25	25

■ A1 / ▲ A2 / ● A4 | SU: Sales unit | All measurements in mm | Other dimensions on request.
Example item no. 912-2-8X40 DIN 912 - A2 - M8 - l = 40mm